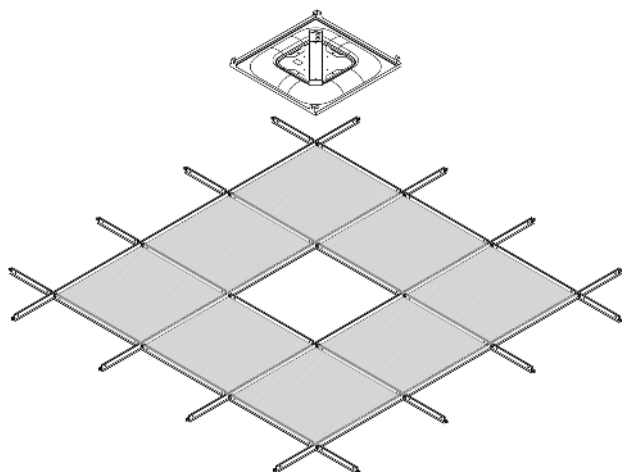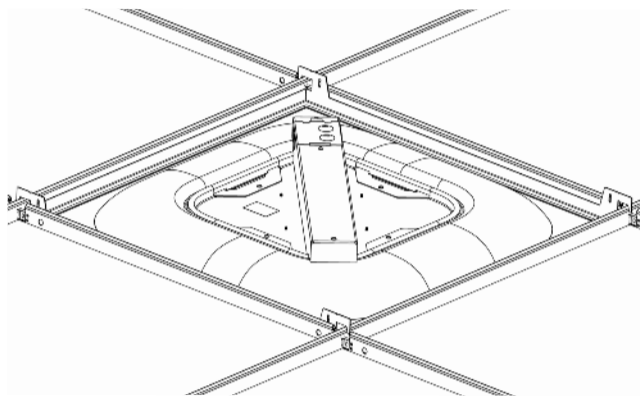# SkyView™ Tile
Installation Guide

bios

STEP 1
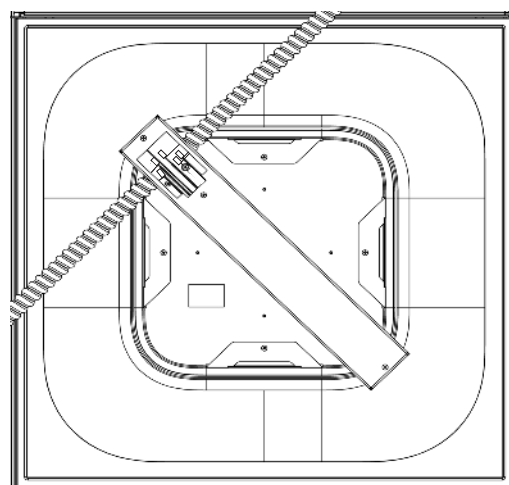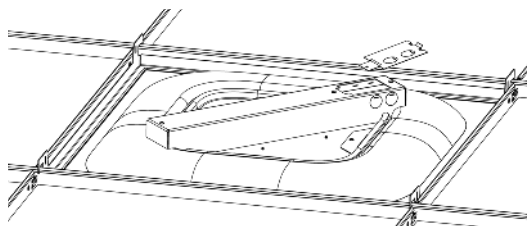Place tile in 2x2 ceiling grid structure.

STEP 2
Fold out t-bar clips over the ceiling grid structure & connect safety wires through safety wire slot.
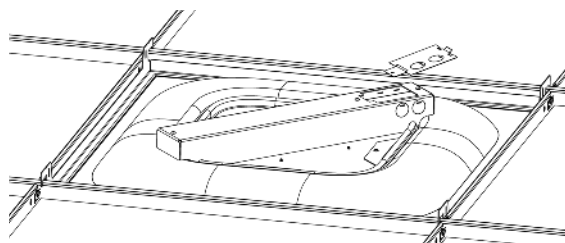

STEP 3
Ensure main power is off. Use screwdriver (not included) to remove the driver cover plate and remove knockouts on driver cover to make connections.

AC connections	0-10v dimming
Black - Line	connections (optional)
White - Neutral	Dim+ - Purple
Green - Ground	Dim- - Pink

STEP 4
Replace driver cover plate, and connect to building power.

For installation instructions and more information:

SkyView™-TILE-INSTALL-REV0 - February 19, 2025
Due to continuous product improvement, specifications and dimensions are subject to change without notice.
Contact SkyView™ for questions and the most current information.

bioslighting.com
321-260-2467
sales.support@bioslighting.com