




SkyView™ Tile

Installation Guide

bios


STEP 1

Place tile in 2x2 ceiling grid structure.

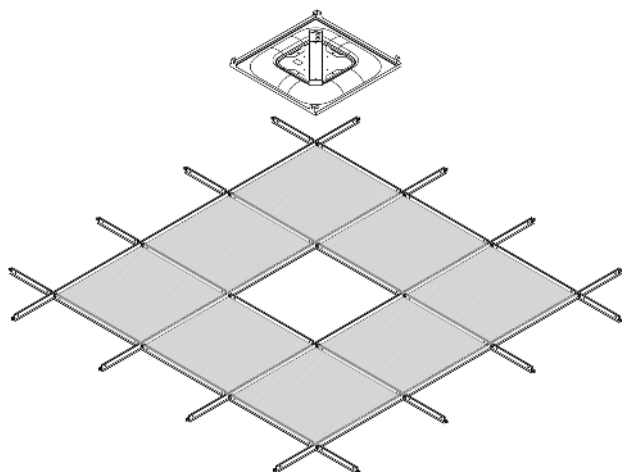

STEP 2



Fold out t-bar clips over the ceiling grid structure & connect safety wires through safety wire slot.

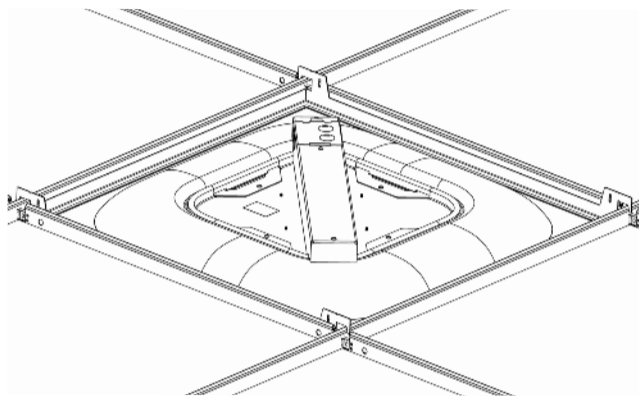

STEP 3


Ensure main power is off. Use screwdriver (not included) to remove the driver cover plate and remove knockouts on driver cover to make connections.

AC connections	0-10v dimming connections (optional)
Black - Line	Dim+ - Purple
White - Neutral	Dim- - Pink
Green - Ground	

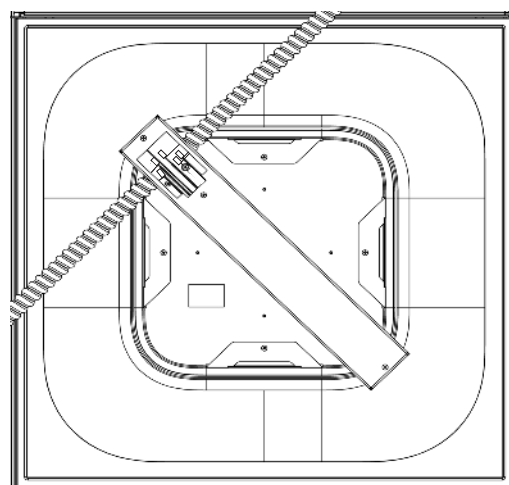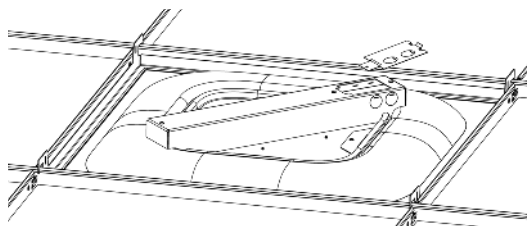

STEP 4

Replace driver cover plate, and connect to building power.

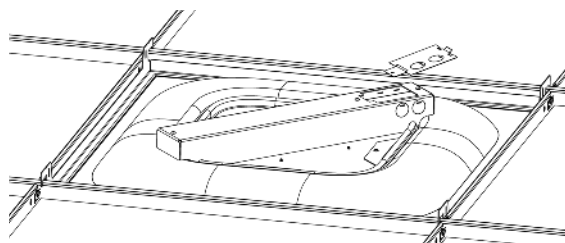

For other documentation
go here:

